

200x1200mm GLAZE VITRIFIED TILES



"SURFACES THAT CONNECT YOU TO NATURE"

Where nature and interior co-exist!


we believe nature has survived it all. We are just on-lookers who might not be here tomorrow. We take inspiration from these wonders of the world.

Just as much as we admire nature, our collection of ceramics is heavily influenced by the divergent tinges of nature. This collection is a personification of elegance, captivating the sight, with an artful touch.

Our motto is to bring spaces alive!





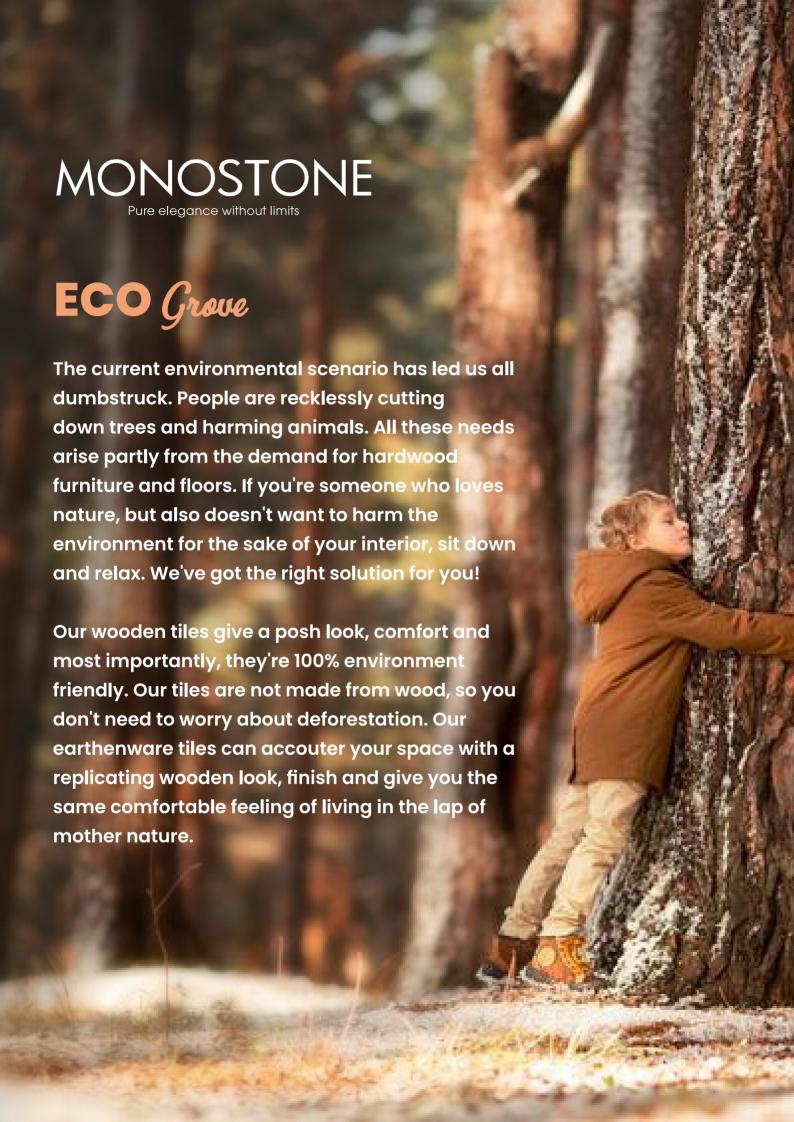




FLOOR WP-01

Size: 200 x 1200 mm



SURFACES: Matt THICKNESS: 10MM

MONOSTONE

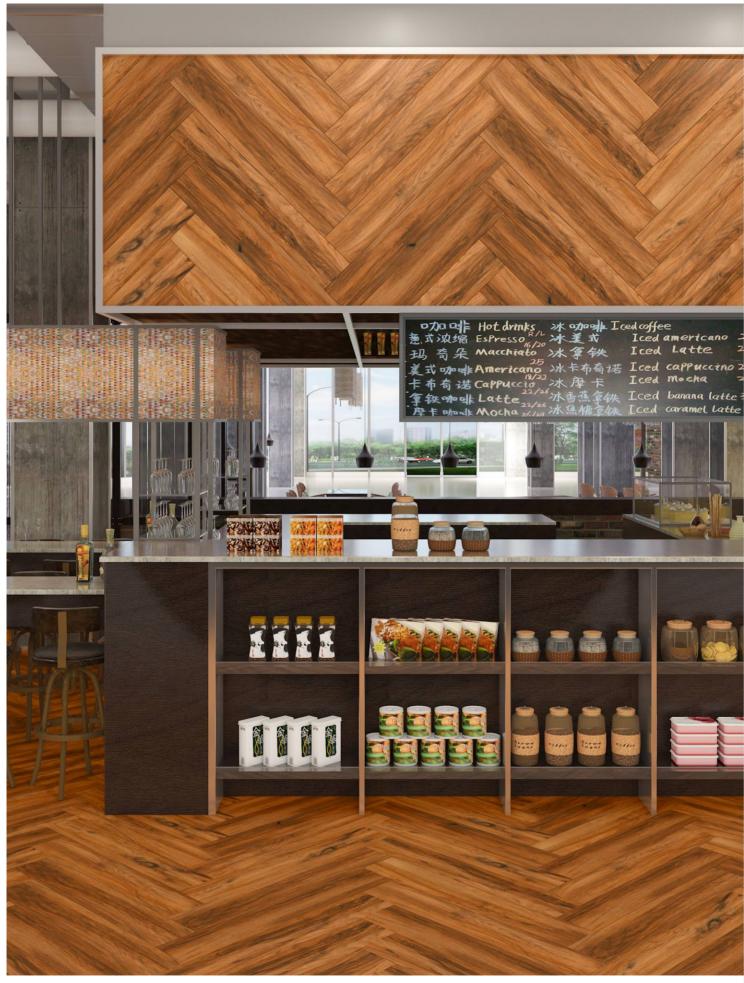

FLOOR WP-01

Size: 200 x 1200 mm

MONOSTONE

Pure elegance without limits

WP-01

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt
THICKNESS: 10 MM

(R-9)





















WP-03 (R-8)



WP-04 (R-4)



WP-05 (R-4)



WP-06 (R-9)









WP-08 (R-10)



WP-09 (R-5)



WP-10 (R-5)



WP-11 (R-5)













WP-20 (R-6)



WP-21 (R-11)



FLOOR WP-22

Size: 200 x 1200 mm



SURFACES: Matt THICKNESS: 10MM

200 x 1200 mm



FLOOR WP-22

Size: 200 x 1200mm

MONOSTONE

WP-22

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt THICKNESS: 10MM

(R-6)























WP-24 (R-6)



WP-25 (R-6)



WP-26 (R-7)



WP-27 (R-1)



















WP-39 (R-5)



WP-40 (R-5)



WP-41 (R-1)



WP-42 (R-10)



FLOOR WP-43

Size: 200 x 1200 mm



SURFACES: Matt THICKNESS: 10MM





FLOOR WP-43

Size: 200 x 1200mm

MONOSTONE

Pure elegance without limits

WP-43

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt
THICKNESS: 10 MM

(R-10)





















WP-44 (R-11)



WP-45 (R-3)



WP-46 (R-1)




WP-47 (R-2)



WP-48 (R-8)



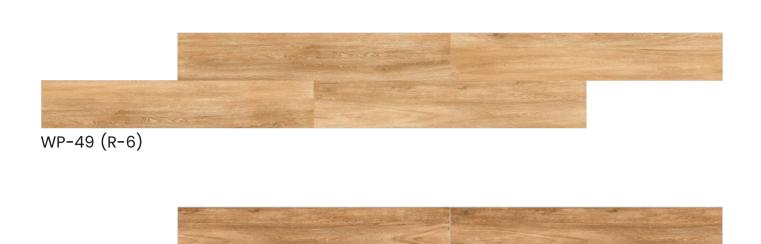

WP-50 (R-8)



WP-51 (R-9)



WP-52 (R-10)



WP-53 (R-10)



FLOOR WP-54

Size: 200 x 1200 mm



SURFACES: Matt THICKNESS: 10MM



FLOOR WP-54

Size: 200 x 1200 mm

WP-54

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt THICKNESS: 10MM

(R-10)



















The best combination is getting a variety along with **quality**.





FLOOR WP-55

Size: 200 x 1200 mm



SURFACES: Matt THICKNESS: 10MM

200 x 1200 m m



FLOOR WP-55

Size: 200 x 1200 mm

WP-55

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt THICKNESS: 10MM

(R-10)























WP-60 (R-8)





FLOOR WP-66

Size: 200 x 1200 mm

GLAZE VITRIFIED TILES



SURFACES: Matt THICKNESS: 10MM

200 x 1200 mm



FLOOR WP-66

Size: 200 x 1200 mm

GLAZE VITRIFIED TILES

WP-66

FORMATOS / SIZES

200 x 1200 MM

SURFACES: Matt THICKNESS: 10MM

(R-5)





















WP-67 (R-7)



WP-68 (R-1)




WP-69 (R-6)

LAYING PATTERNS


MAKE NATURAL LOOKING PATTERNS LIKE INTERLOCKING, RANDOM, **REPETITIVE WITH** PIXEL CERAMICA


Pattern-1












Please note that your stockist may offer the tiles in different pack sizes. All dimensions are standard and all products are designed to be laid with appropriate joints. Please refer to our step-by-step laying guide for additional information on this topic. Also, when using multiple tile packs, always mix the tiles before laying to achieve an overall blended appearance.

ADVANTAGES

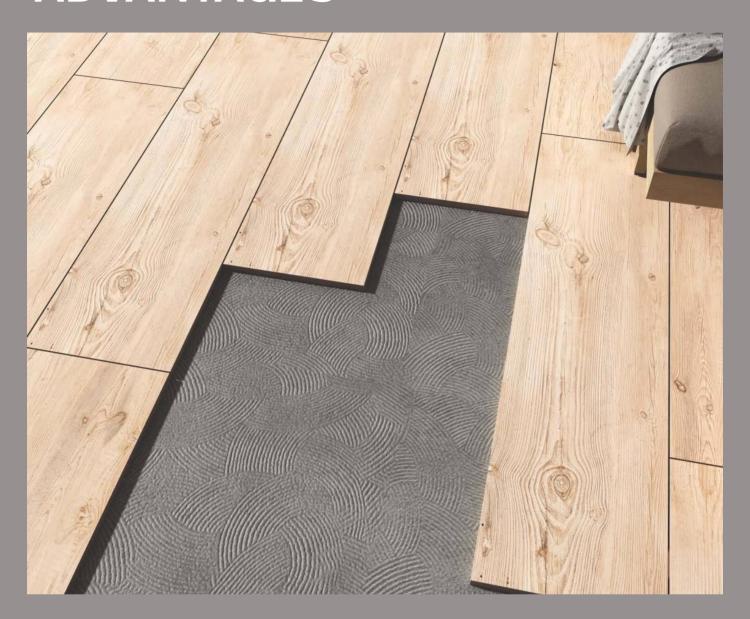



Flexural Resistant



Frost



Chemical



Stain

Resistant

Resistant



Thermo-impact . Resistant



Easy to

Clean

Easy to Install



Resistant



Absorption Resistant



Resistant



Environment Friendly

APPLICATION















MUSEUMS



SHOPS



HOMES



VENTILATED CURTAIN WALLS



HOTELS



INTERIOR DESIGN AND FURNISHINGS



TECHNICAL SPECIFICATION

Sr No.	CHARACTERISTICS	ISO TEST METHODS	VITRIFIED TILES REQUIREMENT AS PER ISO 13006 Bla / EN176 Bla	VITRIFIED TILES IS 15622 : 2006 GROUP Bla	VALUE			
А	Dimension & Surface Quality	mension & Surface Quality						
1	Deviation in Length & Width	ISO 10545-2	+/- 0.6 %	+/- 0.1 %	+/- 0.1 %			
2	Deviation in Thickness	ISO 10545-2	+/- 5.0 %	+/- 4.0 %	+/- 3.5 %			
3	Straightness of sides	ISO 10545-2	+/- 0.5 %	+/- 0.1 %	+/- 0.08 %			
4	Rectangularity	ISO 10545-2	+/- 0.6 %	+/- 0.1 %	+/- 0.1 %			
5	Surface Flatness	ISO 10545-2	+/- 0.5 %	+/- 0.2 %	+/- 0.2 %			
6	Color Difference	ISO 10545-2	Unaltered	Unaltered	No Change			
В	Physical Properties							
1	Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.08%	0.05%			
2	Flexural Strength (MOR)	ISO 10545-4	≥ 35 N mm²	≥ 44 N mm²	44			
3	Mohs Hardness	EN 101	≥ 6	≥ 6	7			
4	Flexural Breaking Strength	ISO 10545-4	> 1300 N	> 1500 N	1900 N			
5	Bulk Density (GM/CC)	DIN 51082	> 2 gm/cc	> 2.2 gm/cc	2.35 gm/cc			
6	Slip Resistance Coefficient of Friction	ISO 10545-17	≥ 0.4	≥ 0.4	≥ 0.6			
С	Chemical Properties							
1	Staining Resistance	ISO 10545-14	Resistant	Resistant	Resistant			
2	Household Chemicals	ISO 10545-13	No Damage	No Damage	No Damage			
D	Thermal Properties	ermal Properties						
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage	Passed			
2	Thermal Expansion	ISO 10545-8	9x10⁻⁶ Max.	9x10 ⁻⁶ - k ⁻¹ Max.	Passed			
3	Moisture Expansion	ISO 10545-10	Nil	Nil	Passed			

Vogue Values given above are our own values, Which we tries to maintain, how ever test results may differ up to the limit prescribed under ISO 13006 / EN 176 Group Bla


PACKING DETAILS

TILE SIZE	NO. OF TILES / BOX	WEIGHT / BOX (approx)	COVERAGE AREA / BOX (approx)	COVERAGE AREA / BOX (approx)
200x1200mm	5 pcs.	27.5 kg.	1.20 sq. mtr.	12.92 sq. ft.

Note:
Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

OVERSEAS NETWORK

AN EXPERIENCED EXPORT COMPANY WITH GLOBAL CUSTOMER BASE.

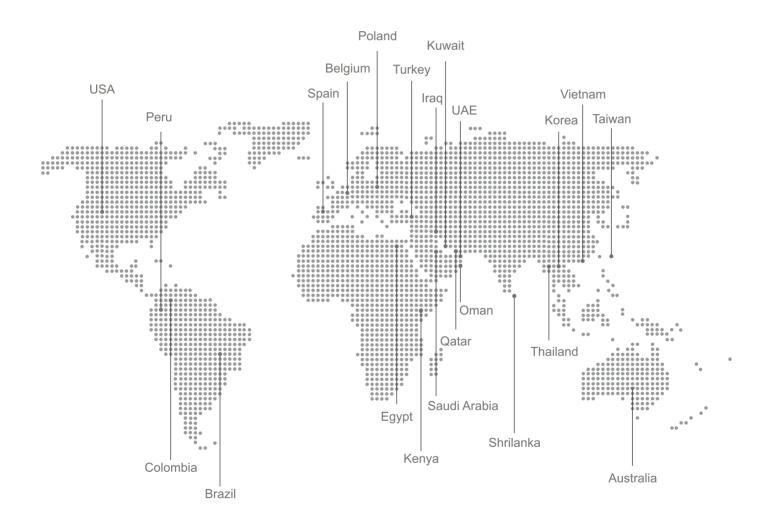





MONOSTONE INTERNATIONAL LLP

602-603 - RK PRIME, Rajkot - Guj. (IN) export@monostone.in | www.monostone.in